


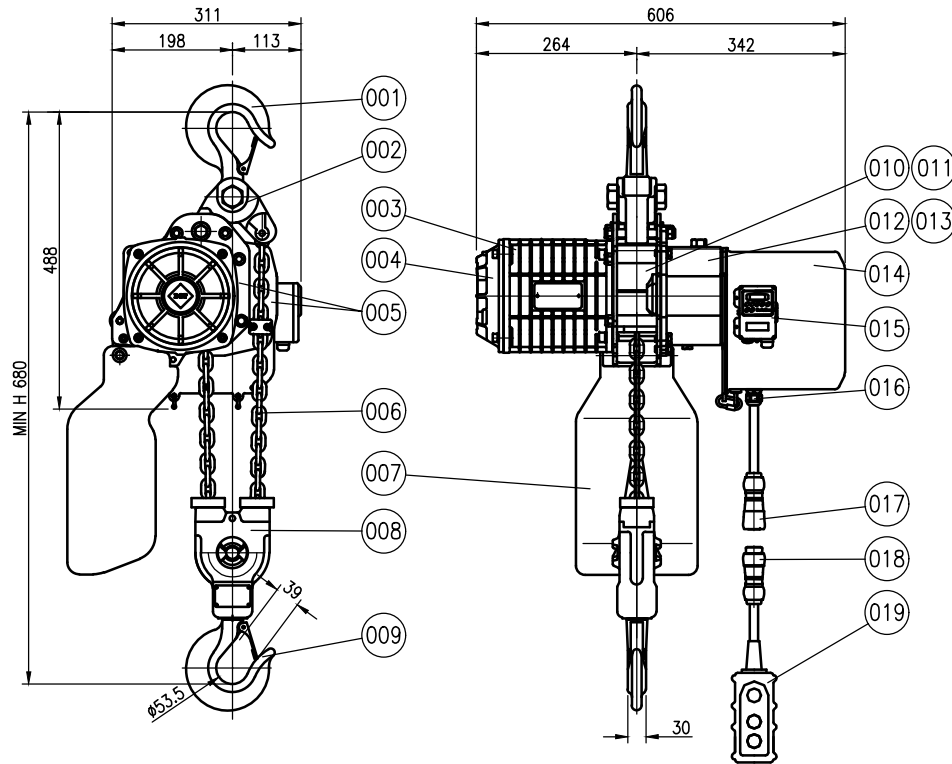

NO	DESCRIPTION	MAT'L	Q'TY	WT(kg)	REMARKS
001	TOP HOOK	SUS304			
002	ARM ASS'Y	SUS304			
003	MOTOR CASE(크로메이트)	ALDC12.1			
004	BRAKE COVER	SUS304			
005	GEAR&MOTOR SIDE PLATE	SUS304			
006	LOAD CHAIN(무전해 니켈도금)	Mn-B STEEL			ø7.1x21
007	CHAIN CONTAINER ASS'Y	PP+SUS304			CCA301
008	BOTTOM HOOK COVER	SUS304			
009	BOTTOM HOOK	SUS304			
010	LOAD SHEAVE(무전해 니켈도금)	GCD450			
011	CHAIN GUIDE	SUS304			
012	GEAR CASE	SUS304			
013	GEAR OIL & CHAIN OIL	NA			FOOD GRADE
014	CONTROL BOX COVER	SUS304			
015	LOAD LIMITER	NA			
016	CABLE GLAND	NA			
017	FEMALE CABLE CONNECTOR	NA			
018	MALE CABLE CONNECTOR	NA			
019	PENDANT & CABLE ASS'Y	NA			

SPECIFICATION

HOISTING LOAD	2		TON
TESTING LOAD	2.5		TON
LIFT HEIGHT	4		M
PENDANT CABLE	3.5		M
HOISTING	SPEED	4.1	2.7
	MOTOR	1.8KW x 4P	1.5KW x 6P
POWER SUPPLY	AC 220,380,440,460,480V x 3ø x 60Hz		
OPERATING METHOD	P.B type ON . FL		
WEIGHT	73.0		KG
ADD. LOAD CHAIN	2.2		KG/M
ADD. PENDANT CABLE	0.2		KG/M

TITLE					DSTFN—2W CHAIN HOIST		PROJECTION	
WORK NO		WORK NAME						
		OUTLINE DWG (MAX. LIFT 6M)			SCALE		Q'TY	
					1/1		1	
DRAWN	CHECKED	REVIEWED	APPROVED	DRAWING NO				
LIM.C.J	—	LEE	Y.K	DSTFN2W301				
2026.03.20	—	2026.03.20	2026.03.20					
DAESAN INoTEC INC								

REV.NO	DATE	REVISION DESCRIPTION	DRAWN	CHECKED	APPROVED