
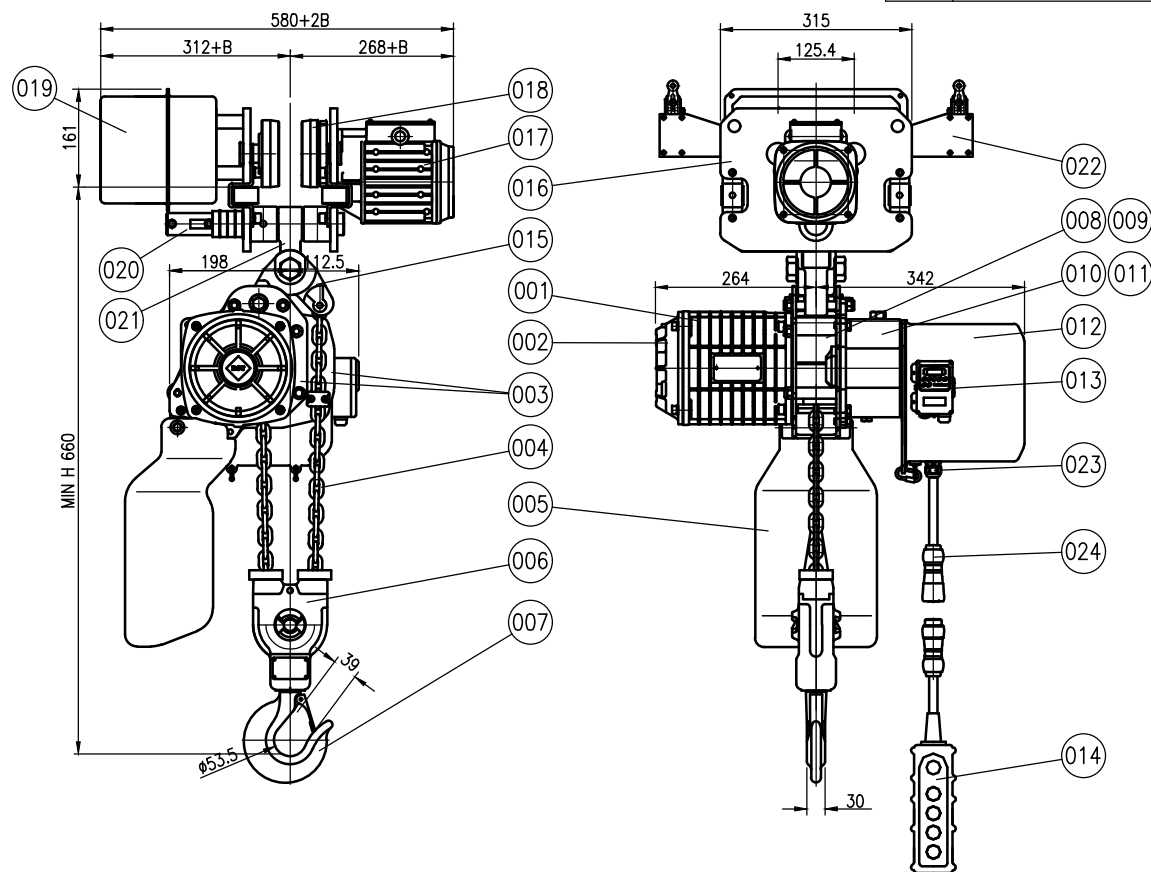


				NO	DESCRIPTION	MAT'L	REMARKS
013	LOAD LIMITER	--	JDL-70	001	MOTOR CASE(크로메이트)	ALDC12.1	
014	PENDANT & CABLE ASS'Y	--		002	BRAKE COVER	SUS304	
015	ARM ASS'Y	SUS304		003	GEAR&MOTOR SIDE PLATE	SUS304	
016	GEAR&PLAIN SIDE PLATE	SUS304		004	LOAD CHAIN(무전해 니켈도금)	Mn-B STEEL	ø7.1x21
017	MOTOR CASE(크로메이트)	ALDC12.1		005	CHAIN CONTAINER ASS'Y	PP+SUS304	CCA301
018	GEAR & PLAIN ROLLER	SUS440A	ø110	006	BOTTOM HOOK COVER	SUS304	
019	CONTROL BOX & COVER	SUS304		007	BOTTOM HOOK	SUS304	
020	SHAFT	SUS304		008	CHAIN GUIDE	SUS304	
021	CONNECTOR	SUS304		009	LOAD SHEAVE(무전해 니켈도금)	GCD450	
022	LIMIT SWITCH	--	OPTION	010	GEAR CASE	SUS304	
023	CABLE GLAND	--		011	GEAR OIL & CHAIN OIL	--	FOOD GRADE
024	CABLE CONNECTOR	--		012	CONTROL BOX COVER	SUS304	



SPECIFICATION				
HOISTING LOAD	2			TON
TESTING LOAD	2.5			TON
LIFT HEIGHT	4			M
PENDANT CABLE	3.5			M
HOISTING	SPEED	2.7	4.1	M/MIN
	MOTOR	1.5KW x 6P	1.8KW x 4P	1SET
TRAVERSING	SPEED	15	22	M/MIN
	MOTOR	0.4KW x 6P or 4P		1SET
POWER SUPPLY	AC 220,380,440,460,480V x 3ø x 60Hz			
OPERATING METHOD	P.B type ON . FL			
WEIGHT	119.0			KG
I-BEAM SIZE	100-150			MM
MINIMUM TURNING RADIUS	800			MM
ADD. LOAD CHAIN	2.2			KG/M
ADD. PENDANT CABLE	0.28			KG/M

TITLE				DSTFNM-2W CHAIN HOIST		PROJECTION	
WORK NO		WORK NAME					
		OUTLINE DWG (MAX. LIFT 6M)				SCALE	Q'TY
						1/1	1
DRAWN	CHECKED	REVIEWED	APPROVED	DRAWING NO			
H.J	—	LEE	Y.K	DSTFNM2W301			
2022.06.27	—	2022.06.27	2022.06.27				
DAESAN INoTEC INC							

REV.NO	DATE	REVISION DESCRIPTION	DRAWN	CHECKED	APPROVED